
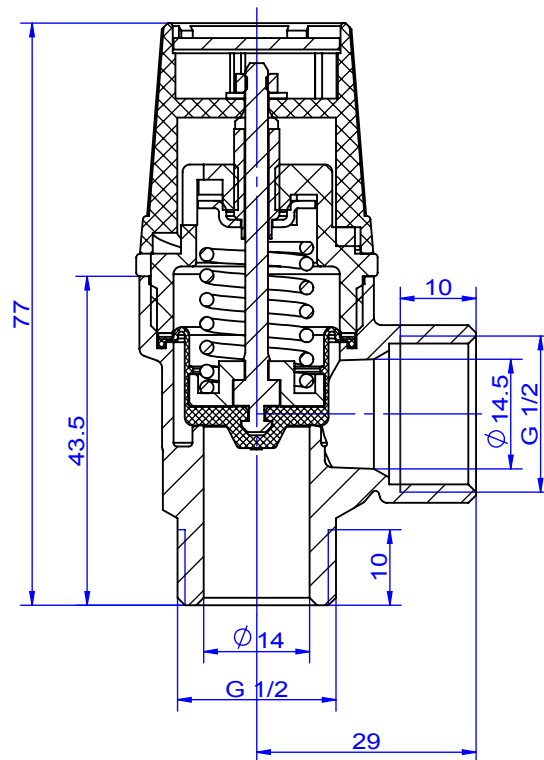
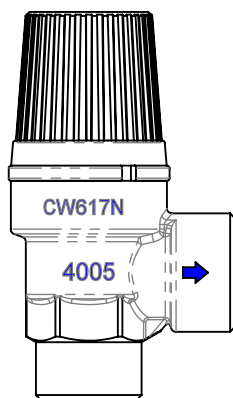
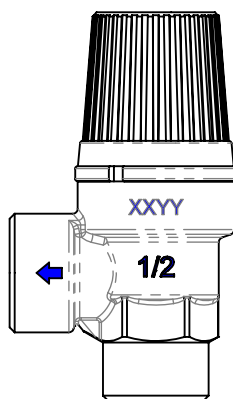


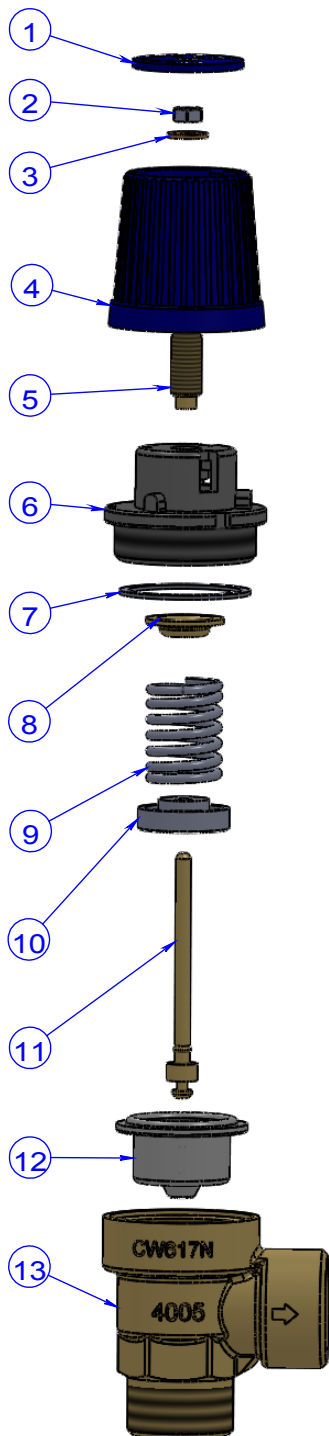

Performance:

1. Temperature range:
2. Max opening pressure:
3. Min closing differential:
4. Medium:
5. Pressure settings:
6. PED category:

2-120 °C
Pnr + 10%
Pnr - 25%
water
1-10 bar
IV

No.	Name	Material	QTY.
1	Nameplate	ABS (RAL5003)	1
2	Hex-nut	Steel	1
3	Brass disk	Brass	1
4	Control knob	PA6+G30 (RAL5003)	1
5	Screw	Brass	1
6	Cover	PA6+G30	1
7	Gasket	POM	1
8	Gasket	Brass	1
9	Spring	AISI304	1
10	Gasket	POM	1
11	Pull rod	Brass	1
12	Diaphragm	EPDM	1
13	Body	CW617N	1

TOLERANCE OF DIMENSIONS AND GEOMETRY UNLESS OTHERWISE SPECIFIED

DIMENSION	GB/T1804-m	ANGLE	PLUMB	CONCENTRICITY
≤6	±0.1			
>6≤30	±0.2			
>30≤120	±0.3			
>120≤400	±0.5			

DESIGN	Radman	2015.07.03
CHECKED	XGW	2015.10.14
PROCESSOR	LWF	2015.10.14
STANDARDIZATION	YSY	2015.10.14
APPROVED	YSY	2015.10.14

PRODUCT TYPE:

4005 (3bar)

TITLE:

Safety valve
Assembly drawing
1/2" M x 1/2" F

MATERIAL:

CW617N

DWG. NO.

24005048000

EDITION

II

PROJECTION MEANS	PRIMO ANGLE OF VIEW	DRAWING UNIT	mm
DESIGN SIGN	G. W	N. W.	SCALE
		121g	1:1

PAGE OF



YORHE FLUID INTELLIGENT CONTROL CO., LTD

EDITION

Customer
drawing number