



FLOWPRO™
Get Pumped!

Quality Range of Macerators at Unbeatable Value


FLOWPRO™

FP400 Macerator for WC and Bathroom

Why Choose This Product?


- Easy access for servicing and maintenance
 - No need to remove the unit, no screws
- Capacity for an en-suite installation
- Quiet technology
- Compact, neat and unobtrusive

Product Dimensions

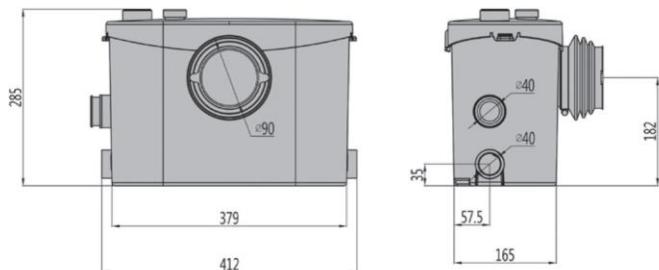

Suitable for

- ✓ WC
- ✓ Basin
- ✓ Shower
- ✓ Bidet

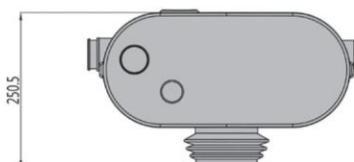

Technical Data

Watts (Consumption)	400w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	135 L/min
Horizontal Discharge	95 metres
Vertical Discharge	9.5 metres
Discharge Pipe	22mm/28mm/32mm/40mm
Inlet Pipe	1 x 100mm/3 x 40mm
Water Temperature	Min 1°C Max 90°C
IP Rating	IPX4

Discharge Height / Flow Rate



ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK


FLOWPRO™

FP400B Macerator for WC and Bathroom

Why Choose This Product?


- Easy access for servicing and maintenance
 - No need to remove the unit, no screws
- Capacity for an en-suite installation
- Quiet technology
- Compact, neat and unobtrusive

Product Dimensions

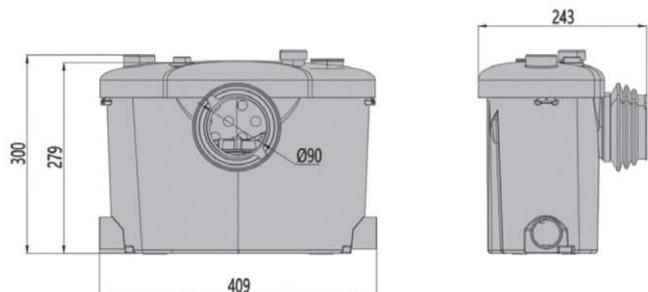

Suitable for

- ✓ WC
- ✓ Basin
- ✓ Shower
- ✓ Bidet

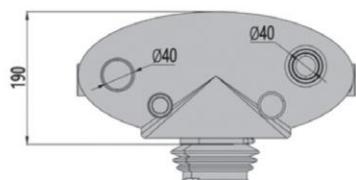

Technical Data

Watts (Consumption)	400w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	135 L/min
Horizontal Discharge	85 metres
Vertical Discharge	8.5 metres
Discharge Pipe	22mm/28mm/32mm/40mm
Inlet Pipe	1 x 100mm/3 x 40mm
Water Temperature	Min 1°C Max 90°C
IP Rating	IPX4

Discharge Height / Flow Rate



ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK


FLOWPRO™

FP400K Macerator for Kitchen, Utilities & Bath

Why Choose This Product?

- Easy access for servicing and maintenance
 - No need to remove the unit, no screws
- Quiet technology
- Compact, neat and unobtrusive

Product Dimensions

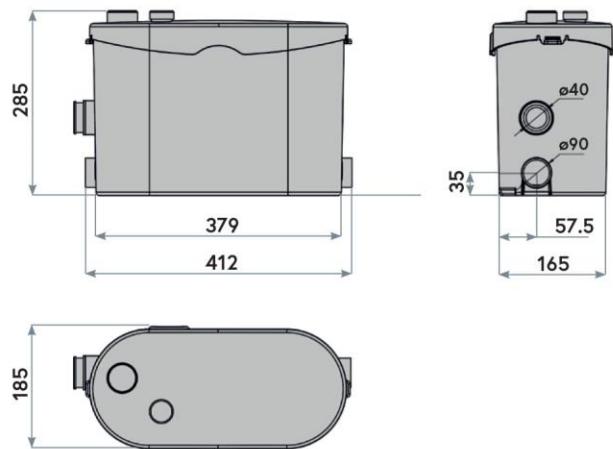

Suitable for


✓ Basin	✓ Bidet
✓ Bath	✓ Dishwasher
✓ Shower	✓ Washing Machine
	✓ Kitchen Sink



Technical Data

Watts (Consumption)	400w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	135 L/min
Horizontal Discharge	105 metres
Vertical Discharge	10.5 metres
Discharge Pipe	22mm/28mm/32mm/40mm
Inlet Pipe	3 x 40mm
Water Temperature	Min 1°C Max 90°C
IP Rating	IPX4

Discharge Height / Flow Rate

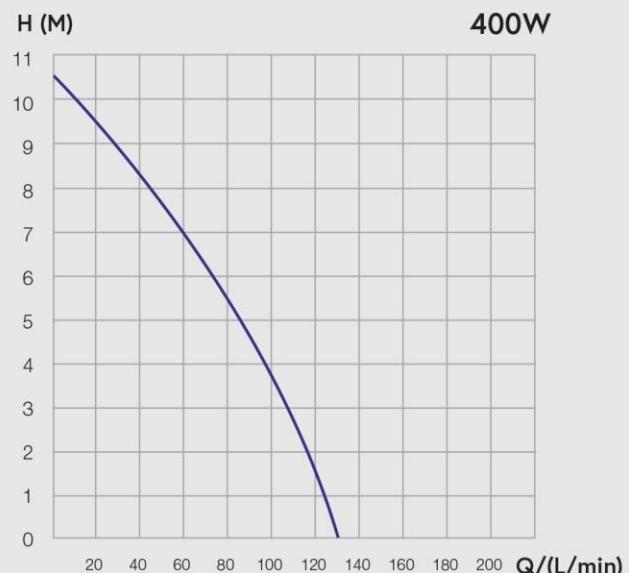

ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK


FLOWPRO™

FP400S Slim Macerator for Wall Hung WC and Bathroom

Why Choose This Product?

- Easy access for servicing and maintenance
 - No need to remove the unit, no screws
- Capacity for an en-suite installation
- Quiet technology
- Compact, neat and unobtrusive

Product Dimensions

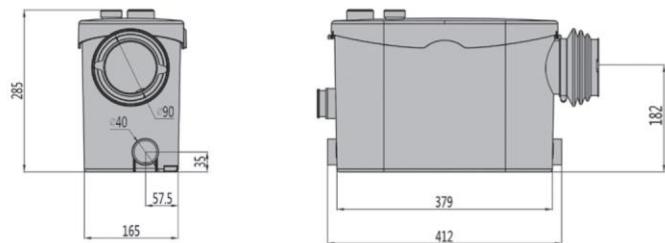

Suitable for


- ✓ WC
- ✓ Back to Wall WC
- ✓ Wall Hung WC
- ✓ Basin
- ✓ Shower
- ✓ Bidet



Technical Data

Watts (Consumption)	400w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	135 L/min
Horizontal Discharge	95 metres
Vertical Discharge	9.5 metres
Discharge Pipe	22mm/28mm/32mm/40mm
Inlet Pipe	1 x 100mm/3 x 40mm
Water Temperature	Min 1°C Max 90°C
IP Rating	IPX4

Discharge Height / Flow Rate

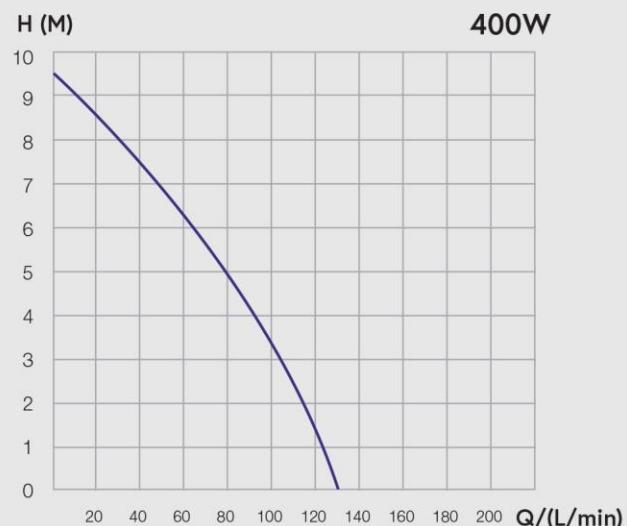

ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK



FLOWPRO™

FP250 Macerator for Showers

Why Choose This Product?

- Quiet technology
- Compact, neat and unobtrusive

Product Dimensions



Suitable for


- ✓ Basin
- ✓ Shower
- ✓ Bidet



Technical Data

Watts (Consumption)	250w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	135 L/min
Horizontal Discharge	100 metres
Vertical Discharge	10 metres
Discharge Pipe	22mm/28mm
Inlet Pipe	2 x 40mm
Water Temperature	Min 1°C Max 90°C
IP Rating	IPX7

Discharge Height / Flow Rate

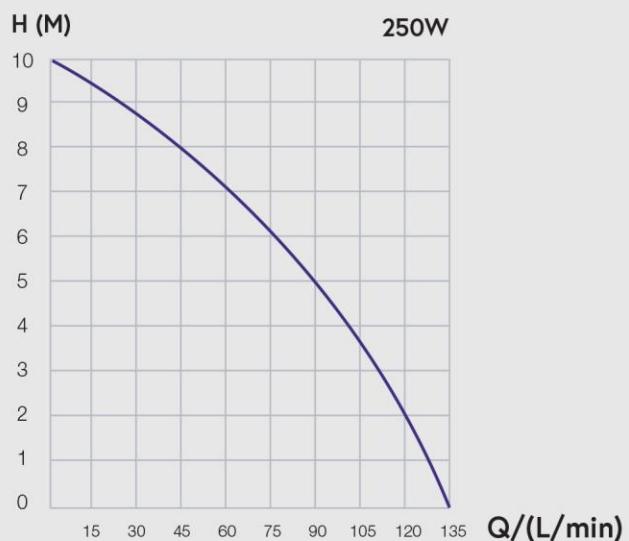

ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK



FLOWPRO™

FP800 Easy Service Access Macerator

Why Choose This Product?


- Our most powerful macerator for Commercial and Heavy Use
- Easiest access for servicing/maintenance - motor removeable in situ
- Capacity for an en-suite installation
- Voice alarm to alert when maintenance required

Product Dimensions

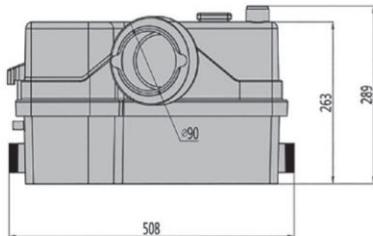

Suitable for

- ✓ WC
- ✓ Basin
- ✓ Shower
- ✓ Bidet
- ✓ Heavy Use/Commercial

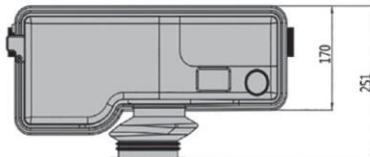

Technical Data

Watts (Consumption)	800w
Electrical Supply	220-240V 50Hz
Flow rate at max head L/min	170 L/min
Horizontal Discharge	90 metres
Vertical Discharge	9 metres
Discharge Pipe	22mm/28mm/32mm/40mm
Inlet Pipe	1 x 100mm/3 x 40mm
Water Temperature	Min 1°C Max 50°C
IP Rating	IPX4

Discharge Height / Flow Rate



ENSURE THERE IS ADEQUATE
FALL ON ALL PIPEWORK