




Living room

Efluid

First connected radiator with 3 wireless communication protocols!

3 in 1
Triple connectivity
Wi-Fi, Z-Wave, BLE

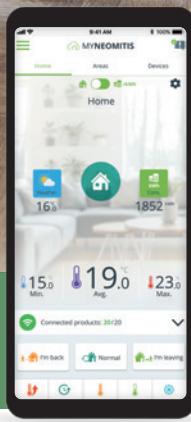

MYNEOMITIS iOS/Android free app and compatible with:

works with the
Google Assistant

Compatible with
Alexa from Amazon



Efluid
online

DEVELOPED
DESIGNED AND
MANUFACTURED
FRANCE

Warranty
3
years
3 years warranty

10 years warranty
Aluminium alloy heater body

Maintenance
free

Comfort surface
temperature

PID technology

Low energy
consumption



Benefits

- + Directly connectable to Internet through your Internet router without any other accessory.
- + Connectable via an IOT BOX using Zigbee 3.0.
- + Can be remotely-controlled by your smartphone, tablet or computer and by voice with the MYNEOMITIS free application.
- + Large backlit display with black background to improve readability.
- + Auto-programmable with dual optimisation feature.
- + EcoSens® innovation pack, comfort, performance and energy savings (see catalogue pages 10 and 11).
- + Occupancy detection.
- + 7 operating modes to suit all needs.
- + Permanent backup of settings.
- + Also available in anthracite grey, this trendy and contemporary finish will match perfectly in a pure design living room.

3 powerful communication protocols in one product to ensure perfect interoperability!

Zigbee® 3.0 to join a home automation box and guarantee a level of interoperability with other products equipped with the same protocol.

Wi-Fi® to connect directly to the MYNEOMITIS universe.

Bluetooth® for the configuration of the product without being connected to an Internet router or Zigbee box, it facilitates and secures the association of the product with the cloud it will join.



Technical specifications

- Aluminium alloy heater body, epoxy paint, white or anthracite grey finish.
- Mineral oil high performance, very low cold viscosity without organic additive (rot), resistant to oxidation and excellent thermal conductivity: long life, maintenance free.
- **Patented automatic lock, easy and quick to install, anti-tilt safety: dual fixing on wall-mounting brackets in painted steel.**
- Drilling template supplied.
- Proportional Integral Derivative control, triggered by a triac with OTA processor for the software remote update.
- Overheating protection.
- 6-order pilot wire: stop (standby mode), Frost protection, Comfort, Comfort -1°C, Comfort -2°C, Eco, compatible with energy programmer.
- Manufactured in France on NF certified site.
- CE, IP24, Class II.

White version	Anthracite version	Powers (W)	Heights (mm)	Widths (mm)	Depths** (mm)	Elements numbers	Gross weights (Kg)
References	References						
PS050S6A	PS050S6ANA	500	580	441	80	4	10
PS075S6A	PS075S6ANA	750	580	522	80	5	11,7
PS100S6A	PS100S6ANA	1000	580	603	80	6	13,6
PS125S6A	PS125S6ANA	1250	580	764	80	8	17,1
PS150S6A	PS150S6ANA	1500	580	845	80	9	19,1
PS200S6A	PS200S6ANA	2000	580	1088	80	12	24,5

* Only available through the free MyNeomitis application.

** For the depth of Efluid installed, add 45 mm to the value of its depth.

