


# Onyx Unvented Direct.

## Technical Specification.

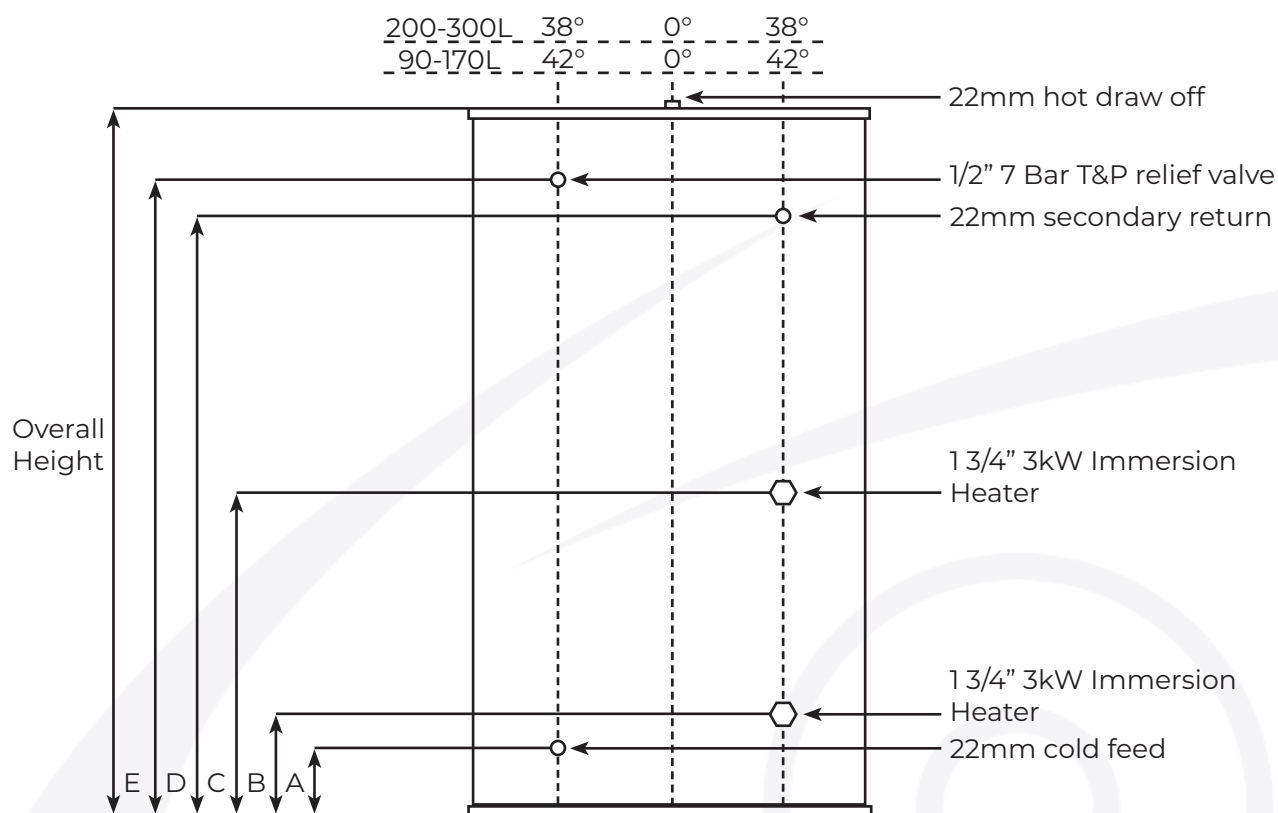

Product Code	ONXD090	ONXD125	ONXD150	ONXD170	ONXD200	ONXD250	ONXD300
Capacity (L)	90	125	150	170	200	250	300
Height (mm)	750	870	1060	1200	1150	1500	1750
Diameter (mm)	510	510	510	510	580	580	580
A (mm)	171	171	171	171	193	193	193
B (mm)	201	201	201	201	223	223	223
C (mm)	421	421	621	621	643	643	643
D (mm)	-	-	-	-	813	973	1253
E (mm)	551	671	876	1026	928	1293	1543
Empty Weight (kg)	30	33	36	40	44	53	59
Full Weight (kg)	119	154	185	209	238	299	353
Standing Heat Loss (kWh/24h)	1.59	1.64	1.85	1.97	1.85	2.00	2.22
Reheat time (mins) (10°C - 60°C)	53	73	87	99	116	145	175
Standing loss (W)	66	68	77	82	77	83	92
Energy efficiency class	C	C	C	C	C	C	C
Operating pressure (bar)	3	3	3	3	3	3	3
Max incoming supply (bar)	12	12	12	12	12	12	12

# Onyx Unvented Direct.

Features and Benefits.

- **Manufactured in Britain**
- **25 year cylinder warranty**
- **2 year warranty on parts**
- **22MM Compression fittings included**
- **Available from 90-300L**
- **Next day availability**
- **WRAS Approved**
- **G3 unvented kit supplied**
- **White cased finish**



The Onyx Direct cylinder is an all-electric solution designed for properties without a traditional boiler. It comes with two 3kW Immersion heaters. One for use with a timer and another as a back up. From 170L and above the main immersion is supplied with a Smart Eco thermostat, providing reliable and efficient hot water.

Manufactured in the UK to the highest standards, the Onyx Direct cylinder is made from premium Duplex stainless, offering corrosion resistance and long term durability. Ideal for homes and apartments it delivers excellent hot water performance, making it ideal for all-electric installations.

*Supplied with: Pressure Reducing Valve, Expansion Vessel, Temperature and Pressure relief valve (factory fitted), Tundish, 2x Immersion Heater.*

